


ACTIVATED CARBON PELLET PANEL FILTER

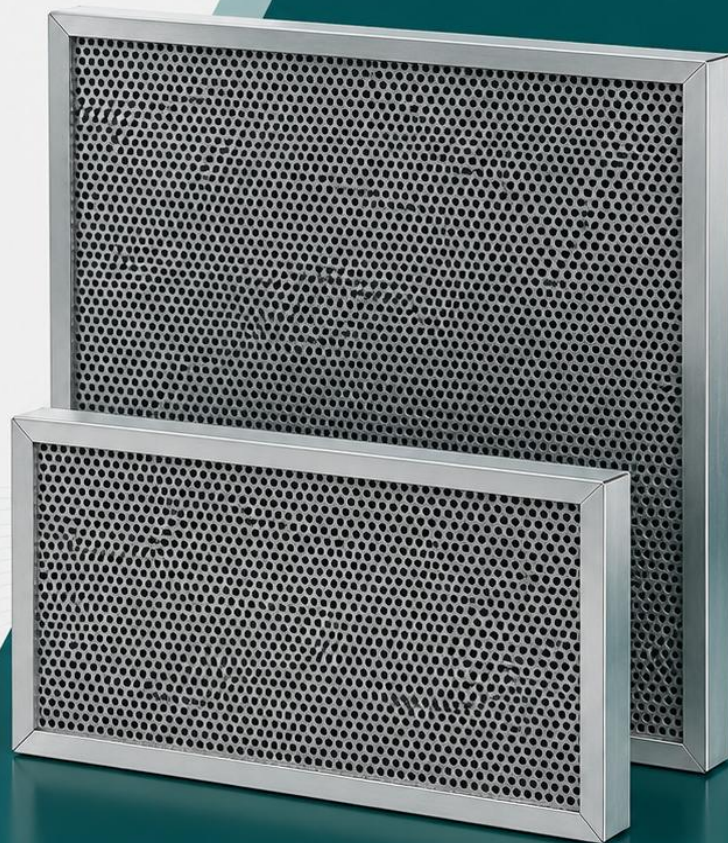

Application	Odour and VOC removal in HVAC and industrial ventilation systems.
Frame	Galvanized
Media	Activated Carbon Pellet
Faceguard	Galvanized Expanded Mesh
Gasket	Optional / EPDM Flat continuous and PU Foam
Final Pressure Drop	250 Pa
Max Temperature (°C)	50°C

KEY FEATURES

- High-capacity activated carbon pellet media.
- Durable galvanized steel construction.
- Low pressure drop for energy savings.
- Custom sizes and carbon grades available.

GAS PHASE FILTER

Code	Dimension (mm)	Contact Time	Filter Class	Media Area (m²)	Air Flow (m³/h)	Pressure drop (Pa)
GPS-PP-2-0G-287-592-30	287-592-30	0.25-0.35	Activated Carbon	2,80	175	45
GPS-PP-2-0G-492-592-30	492-592-30	0.25-0.35	Activated Carbon	4,80	290	45
GPS-PP-2-0G-592-592-30	592-592-30	0.25-0.35	Activated Carbon	5,80	350	45
GPS-PP-2-0G-287-592-48	287-592-48	0.25-0.35	Activated Carbon	4,50	175	80
GPS-PP-2-0G-492-592-48	492-592-48	0.25-0.35	Activated Carbon	7,70	290	80
GPS-PP-2-0G-592-592-48	592-592-48	0.25-0.35	Activated Carbon	9,00	350	80

ORDERING CODE STRUCTURE

Filter Model	GPS-PP	Gas Phase Series Pellet Panel Filter
Frame	GL	Galvanized
	AL	Aluminium
	SS	Stainless Steel
	CB	Cardboard
	PL	Plastic
	MD	MDF
Filter Class	-	Activated Carbon
Face Guard	0	Wire Free
	1C	Single Clean Side Grid
	1D	Single Dirty Side Grid
	2	Double Side Grid
Gasket	0G	No Gasket
	P1C	PU Foam Clean Side
	P1D	PU Foam Dirty Side
	P2	PU Foam Both Side
	E1C	EPDM Flat Clean Side
	E1D	EPDM Flat Dirty Side
	E2	EPDM Flat Both Side